



**WALTEK'S SERIES 7000-UmaxPLUS
SEMI & UNITIZED FRAMING SYSTEM
STANDARD PROFILE SIZES**

NOTES: PROJECT SPECIFIC CUSTOM PROFILE SIZES ARE AVAILABLE UPON REQUEST.

EXTERIOR COVER OPTIONS

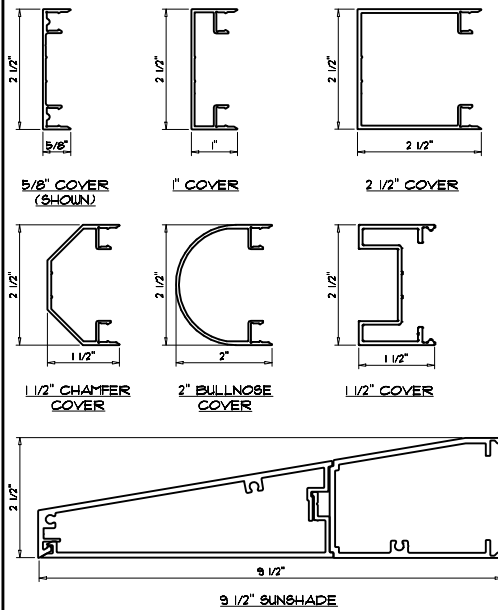


NOTES: CUSTOM EXTRUSION PROFILES ARE ALSO AVAILABLE.

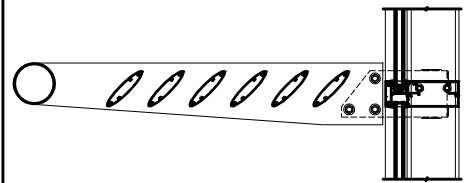

PROJECTING SUNSHADES AND/OR LIGHT SHELVES AVAILABLE

SILL TRIM OPTIONS

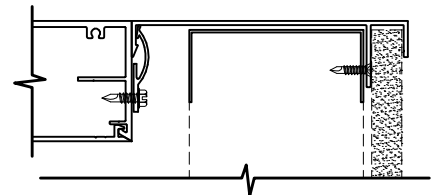

NOTES: PROJECT SPECIFIC CUSTOM SILL DEPTHS AND PROFILES ARE AVAILABLE UPON REQUEST.

FINISHING OPTIONS

- EXTERIOR:
KYNAR 500/ HYLAR 5000
ANNODIZED
- INTERIOR:
KYNAR 500/ HYLAR 5000
ACRYLIC
ANNODIZED

GLAZING OPTIONS

7000-Umax SERIES FRAMING SYSTEMS
ACCOMMODATE GLAZING OPTIONS FROM
1" INSULATED TO 1 3/4" DOUBLE INSULATED

TYPICAL PERFORMANCE LEVELS

AIR: 0.05 CFM/SQ.FT. AT 6.24 LBS/SQ. FT.
PER ASTM E283

WATER: 12 LBS/SQ. FT. PER ASTM E331

CRF: 65 PER AAMA 1503
HIGHER PERFORMING VERSIONS ARE
AVAILABLE FOR SPECIFIC PROJECT NEEDS.

VISIT US ON THE WEB AT: WWW.WALTEKLTD.COM - OR E-MAIL US AT SALES@WALTEKLTD.COM

CINCINNATI: (513) 577-7980

NASHVILLE: (615) 251-7040

SYSTEM

WALTEK'S SERIES 7000-UmaxPLUS
SEMI & UNITIZED
FRAMING SYSTEM



THE ABOVE INFORMATION IS FOR A TYPICAL APPLICATION. CUSTOMIZATION OF ALL COMPONENTS AND PERFORMANCE LEVEL IS AVAILABLE TO MEET DESIGN CRITERIA.

IF YOU WOULD LIKE TO LEARN MORE ABOUT OUR WALL SYSTEMS OR WISH TO DISCUSS PROJECT SPECIFIC DETAILS, PLEASE CONTACT US AT THE ADDRESS & PHONE NUMBER SHOWN.